



TECHNICAL PRODUCT DATASHEET





UPDATED: 23/09/2022

Hantex™ SNX15

A polyester and Lycra blended liner with lightweight sandy nitrile foam coating

A 15 gauge lightweight polyester and Lycra blended red colour coded liner moulds to the hand after minimal usage providing a second skin sensation for the user. Excellent dexterity is enhanced by the sandy nitrile foam palm coating, that provides abrasion resistance and unbeatable grip in wet or oily conditions. Ergonomically designed for prolonged and comfortable use, the Hantex SNX15 is fully breathable for all day use.



FEATURES AND TECHNOLOGY











G/HANTEX-SNX15

SANDY NITRILE





SANDY NITRILE

TYPICAL INDUSTRIES



PURPOSE












OIL, GAS & MINING LOGISTICS & WAREHOUSING

TECHNICAL INFORMATION

ORDER REF #

COATING MATERIAL

PACKING	PER PACK: 10 x Pair
	PER CASE: 120 x Pair
SIZES AVAILABLE	6 (XS), 7 (S), 8 (M), 9 (L), 10 (XL), 11 (2XL)
EU TYPE CERTIFICATION BY	CCQS Certification Services Limited Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15, D15 AKK1, Ireland (Notified Body No. 2834)
UKCA TYPE CERTIFICATION BY	CCQS UK Limited 5 Harbour Exchange Square London, E14 9GE, United Kingdom (Notified Body No. 1105)

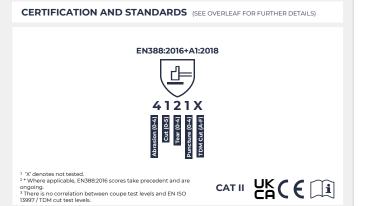





Fax: +44 (0)1902 451 271



Web: www.ultimateindustrial.co.uk



Registered in England No. 2035621






TECHNICAL PRODUCT DATASHEET

GENERAL HANDLING



UPDATED: 23/09/2022

CERTIFICATION LEGENDS







NEWTON LEVEL

For dulling during cut resistance test (6.2), the coupe test results are only indicative while the TDM cut resistance test (6.3) is the reference performance result.







* For details regarding permissable use exposure, see seperate

FURTHER INFORMATION

STORAGE / TRANSPORT: Keep away from direct sunlight; store in a cool dry place. Keep away from ozone sources or naked flame. Store the gloves in their original packaging. During transportation, ensure the product is well packaged and protected in order to prevent any damage.

PRECAUTIONS BEFORE USE: 1. Never use these gloves with chemicals. 2. Gloves should not be used when there is a risk of entanglement with moving machine parts. 3. Before usage and periodically during usage, inspect the gloves for any defects or imperfections. Avoid wearing damaged, dirty or worn out gloves. 4. The gloves should not come in contact with a naked flame or fire. 5. Do not subject to high speed or serrated blades. 6. Always read enclosed user instructions before using these gloves. 8. The information provided is for products in a new condition and does not reflect the actual duration of protection in the workplace. 9. Service life cannot be specified and depends on the application and the responsibility of the user to ascertain suitability of the glove for its intended use

CONSTITUENTS / ALLERGIES: Some gloves may contain ingredients which are known to be a possible cause of allergies in sensitive persons who may develop irritant and/or allergic contact reactions. If an allergic reaction should occur seek medical advice immediately. This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

For more information about this product, or to access the Declaration of Conformity or Product Certification, visit; https://www.ultimateindustrial.co.uk/hand-and-arm/general-handling/hantex-snx15

If appropriate to the product, EC/EU Declaration of Conformities, relevant certification and supporting documentation are available to access through your distributor, at the above web address(s) or by contacting UCi customer services quoting the product reference code. This document and any other statement provided herein by or on behalf of UCi are given for informational purposes and do not constitute a contractual agreement nor warranty of merchantability. UCi assumes no responsibility for the suitability or adequacy of an end user's selection of product for a specific purpose. The manufacturer reserves the right to make any modifications it deems necessary. All product and company names are trademarksTM or registeredTM trademarks of their respective holders. © UCI Limited, 2020





II Fax: +44 (0)1902 451 271



Web: www.ultimateindustrial.co.uk



¹ Testing carried out on the palm material. Except in cases where the glove is equal to or over 400mm - where the cuff is tested also tested. ² 'X' denotes Not Tested. ³ Where applicable, EN3882016 scores take precedent and are ongoing. There is no correlation between coupe test levels and ISO 13997 / TDM cut test levels. Where both EN3882016 and EN3882003 scores are shown, the latter is shown for informational purposes only.